

ACUITIS MINI-RIC WITH S-RECEIVER

1 Performance level Mélodie




The Acuitis MINI-RIC uses the wireless technology and TRUE ISP, True-Input technology platform. Volume control and program shift via RC-DEX. Uses a size 10 battery.


Minimal to severe hearing losses

FEATURES	Mélodie
Performance	x
Platform	D
High-frequency boost	
Wind noise attenuation/control	N/Y
Speech Enhancer	
Focus setting	•
Digital Pinna	
TruSound Softener	
Noise Reduction	•
Sound Class Technology	
HD Locator	in channels
Programs	3
ZEN	
Audibility Extender	•
Compression	IE
SmartSpeak/SmartTone	•
Protection Class IP58	•
ACCESSORIES	Mélodie
App for iPhone, Android and new functionality	Via COM-DEX
DEX accessories	•
Multiple earware options	•


SUGGESTED FITTING RANGE

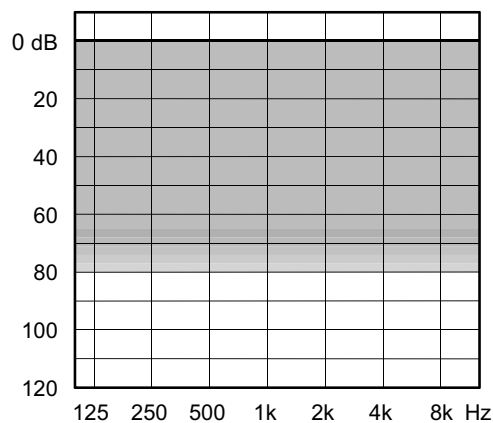


MAXIMUM OUTPUT - EAR SIMULATOR IEC 60118-0

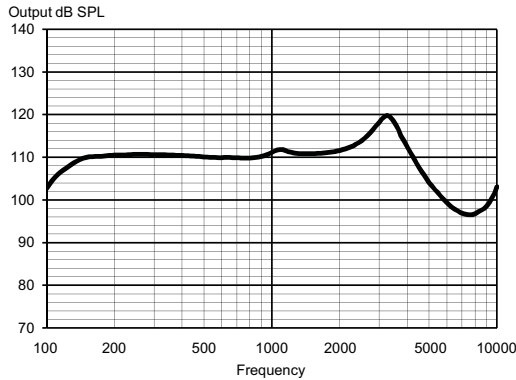


MAXIMUM OUTPUT - 2CC COUPLER IEC 60118-7 / ANSI S3.22-2009

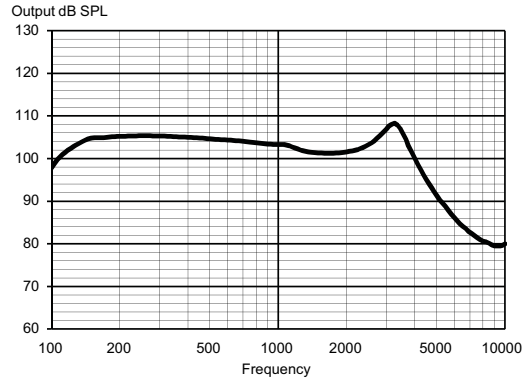

OUTPUT - EAR SIMULATOR IEC 60118-0

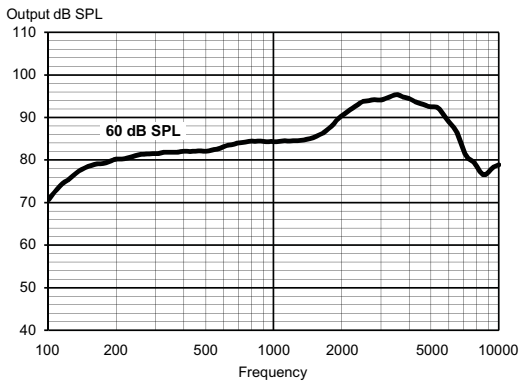

OUTPUT - 2CC COUPLER IEC 60118-7 / ANSI S3.22-2009

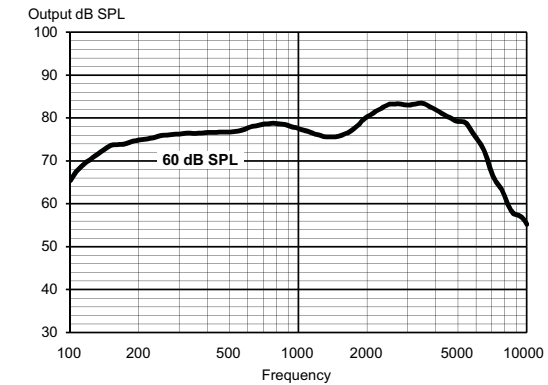

Technical data Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Test mode 1, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact Acuitis.

		IEC 60118-0	ANSI S3.22-2009 / IEC 60118-7
OSPL90	2500 Hz Peak Average	114 dB SPL 120 dB SPL 111 dB SPL	103 dB SPL 108 dB SPL 102 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz Peak Average	93 dB SPL 95 dB SPL 85 dB SPL	83 dB SPL 84 dB SPL 79 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz Peak Average	62 dB 62 dB 58 dB	51 dB 52 dB 50 dB
Frequency range		100 Hz - 10000 Hz	100 Hz - 8400 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		21 dB SPL	25 dB SPL
Battery drain (stand by)		0.98 mA	0.98 mA
Battery drain		0.98 mA	0.99 mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		90 (>85)	90 (>85)
Mobile phone immunity		IRIL: -30/3 dB SPL	U-rating: M4